
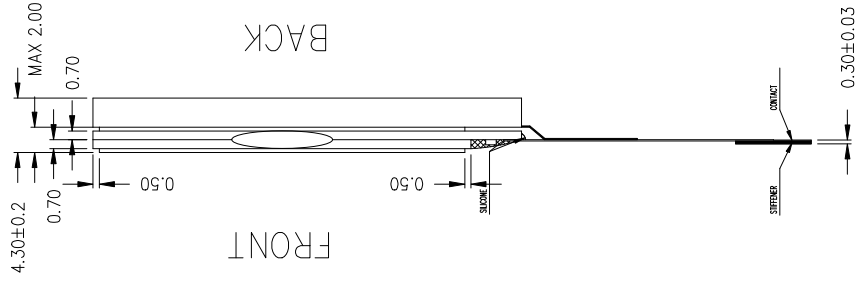


All Pages Of This Edition Approved

Signature: \_\_\_\_\_


Date: \_\_\_\_\_

REV.	DESCRIPTION	REVISER	DATE
A0	First issue	WZO	2018.09.13
A1	背光模组用PC端子	WZO	2018.12.29
A2	背光模组用PC和接口	WZO	2019.6.10
A3	FPC长度改23MM	WZO	2019.6.14
A4	FPC长度改36MM	WZO	2019.8.2

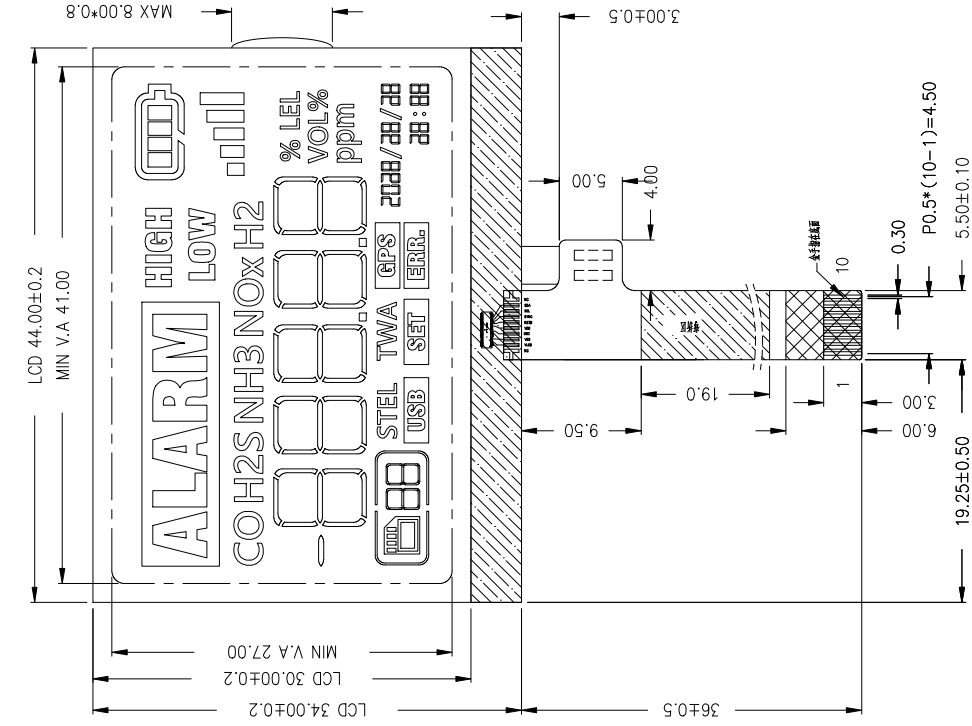

PIN ASSIGNMENT

NO.	NAME.
1	VLCD
2	VSS
3	OSC
4	VDD
5	RSTB
6	SYNC
7	SCL
8	SDA
9	LED_A
10	LED_K



Specifications:

1. Display Mode: FSTN/Transflective/Positive.
2. Viewing Angle: 6 0'clock.
3. Drive Method: 1/4 Duty, 1/3 Bias, V<sub>dd</sub>=3.3V.
4. Top: -20°C~+70°C, T<sub>st</sub>: -30°C~+80°C.
5. Connector: COG+FPC.
6. Drive IC: UC1671C, I2C interface.
7. Backlight: 3pcs White LED, recommended current ≤ 30mA.
8. With " \* " Mark Dimensions Are Important Dimensions.

UNSPECIFIED TOLERANCE:	±0.20	UNITS: mm	DATE:
DESIGN BY:	WZO	2018/9/13	
CHECKED BY:			
APPROVED BY:			

DO NOT SCALE THIS DRAWING.	PROJECTION	SHEET: 1 OF 1
		DATE: 2018/9/13